





C-07 WSAK系列组合式接线端子

WSAK系列
接地型接线端子



WSAK系列 接地型接线端子				
外形尺寸		WSAK - 2.5JD 接地型接线端子	WSAK - 4JD 接地型接线端子	WSAK - 6JD 接地型接线端子
宽度/厚度/高度(mm)		57/6/37	57/6.5/41	57/8/41
螺丝公称直径(mm)		M 2.5	M 3	M 3.5
扭距(Nm)		0.4...0.8	0.5...1.0	0.8...1.6
剥线长度(mm)		10	12	12
额定数据				
电压(V)/电流(A)				
额定工频耐压				
截面(mm ²)		2.5mm ²	4mm ²	6mm ²
夹紧导线范围				
单股导线(mm ²)		0.5...6	0.5...6	0.5...10
多股导线(mm ²)		1.5...4	1.5...6	1.5...10
多股导线(带管状端头)(mm ²)		0.5...2.5	0.5...4	0.5...6
安装轨 L 1.2 - 7.5				
隔板(厚1.5mm)				
隔片 (GP 1 GP 2)				
联接件				
2路				
3路				
10路				
固定件				
SEK - 2G2				
熔芯G型 测试插头PS				
空白				
横向印字				
竖向印字				

C-07 WSAK系列组合式接线端子

WSAK系列
接地型接线端子

WSAK系列 接地型接线端子				
外形尺寸		WSAK - 10JD 接地型接线端子	WSAK - 16JD 接地型接线端子	WSAK - 35JD 接地型接线端子
宽度/厚度/高度(mm)		44/10/56	50/12/56	60/16/58
螺丝公称直径(mm)		M 4	M 4	M 6
扭距(Nm)		2.0...2.4	2.0...2.4	2.5...5.0
剥线长度(mm)		12	15	20
额定数据				
电压(V)/电流(A)				
额定工频耐压				
截面(mm²)		10mm²	16mm²	35mm²
夹紧导线范围				
单股导线(mm²)		1.5...16	2.5...16	6...35
多股导线(mm²)		1.5...16	2.5...16	10...35
多股导线(带管状端头)(mm²)		0.5...10	4...16	10...35


C-08 WSAK系列配件

		
	WSAK - B 1 标记座	WSAK - B 2 标记座
外形尺寸		
宽度/厚度/高度(mm)	43/9.5/35.5	42.4/20/43.2
书写面积(mm²)	7.5*37	17*37
安装轨 L 1.2 - 7.5		

C-09 MBK通用型小型接线端子

MBK系列


通用小型接线端子

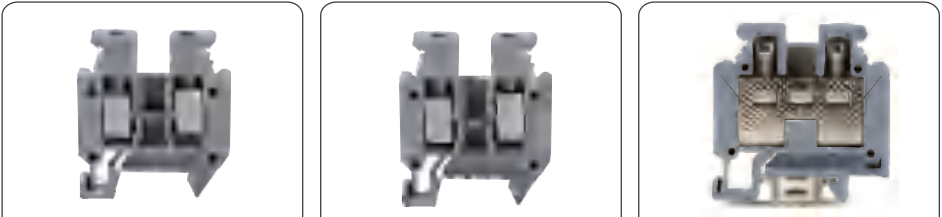			
外形尺寸	MBK 2.5	MBK 4	PCMB 6/E
宽度/厚度/高度(mm)	5.2/28/32	6.2/28/32	8.2/35/36
额定数据	电压(V)/电流(A)/规格	电压(V)/电流(A)/规格	电压(V)/电流(A)/规格
IEC 60947 - 7- 1	400 /24/0.2- 2.5mm ²	500 /32/0.2- 2.5mm ²	500 /41/0.5- 6.0mm ²
UL 1059	300 /20/24- 12 AWG	300 /30/24- 10 AWG	300 /50/20- 8 AWG
技术参数符合IEC /DINVED 标准			
最大额定工作电流/截面积 (A/mm ²)	24/2.5	32/4	41/4
使用边插式桥接件时接导线最大截面积 例/柔性	2.5/2.5mm ²	4/4mm ²	6/4mm ²
额定冲击电压/污染等级 (KV)	6/3	6/3	6/3
过电压等级/绝缘材料组别	III/ I	III/ I	III/ I
夹紧导线范围			
刚性导线/柔性导线 (mm ³)	0.2...2.5/0.2...1.5	0.2...1.5/0.2...1.5	0.5...2.5/0.5...2.5
多股导线(带管状端头)(mm ³)	0.2...1.5	0.2...1.5	0.5...2.5
带TVVIN 管状预绝缘接头 (柔性导线) (mm ²)	0.5...1	0.5...2.5	0.5...2.5
剥线长度(mm)	8	8	10
塞规	A3	A3	A5
螺丝类型(mm)	M3	M3	M4
扭距(Nm)	0.5	0.5	1.2
绝缘材料	PA	PA	PA
UL 94材料阻燃等级	V0	V0	V0
配件			
隔板(厚1.5mm)	D- MBK 2.5	D- MBK 4	D- MBK 4
固定式桥接件 (带绝缘圈) /最大电流	FBRI 10- 5/24A	FBRI 10- 6/32A	FBRI 10- 6/41A
固定式桥接件 (带卡定距小套管)			
边插式桥接件/最大电流 (A)	EB 2- 5 EB 3- 5 EB 10- 5/22A	EB 2- 5 EB 3- 5 EB 10- 5/32A	EB 2- 5 EB 3- 5 EB 10- 5/41A
两端子或桥接端子组开关桥		SBRN 2- 7	SB 2- 8/13
带绝缘垫块桥接件			ISSBI 10- 8
绝缘垫块			IS- K10
隔片		TS- KK3	TS- KK3
分组隔板(厚2.5mm)	ATP - MBK	ATP - PCMB	ATP - PCMB
两端子或桥接端子组开关桥			
测试插孔座	DSB 3/10/4	DSB 3/10/4	DSB 3/10/4
标记条	ZB5	ZB5	ZB5
螺丝刀	SZS 0.6X3.5	SZS 10X4.0	SZS 10X4.0

C-09 MBK通用型小型接地端子

MBK系列

通用小型接地端子

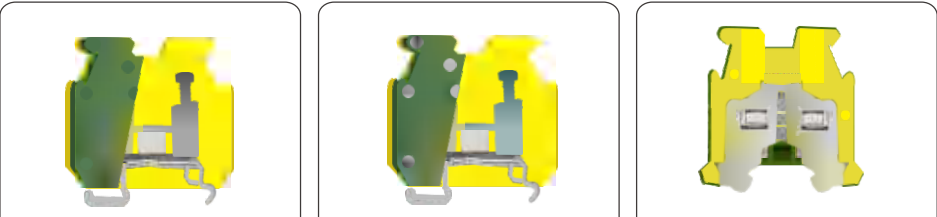			
外形尺寸	MBK 2.5- PE	MBK 4- PE	PCMB 6/E - PE
宽度/厚度/高度(mm)	5.2/28/31.5	6.2/28/32	8.2/39/36
额定数据	电压(V)/电流(A)/规格	电压(V)/电流(A)/规格	电压(V)/电流(A)/规格
IEC 60947 - 7- 12	0.2- 2.5mm ²	0.2- 4mm ²	0.5- 6.0mm ²
UL 1059	24- 12 AWG	24- 10 AWG	20- 8 AWG
技术参数符合IEC /DINVED 标准			
额定冲击电压/污染等级 (KV)	6/3	6/3	6/3
过电压等级/绝缘材料组别	III/ I	III/ I	III/ I
夹紧导线范围			
刚性导线/柔性导线 (mm ³)	0.2...2.5/0.2...1.5	0.2...1.5/0.2...1.5	0.5...2.5/0.5...2.5
多股导线(带管状端头)(mm ³)	0.2...1.5	0.2...1.5	0.5...2.5
带TVVIN 管状预绝缘接头 (柔性导线) (mm ²)	0.5...1	0.5...2.5	0.5...2.5
剥线长度(mm)	8	8	10
塞规	A3	A4	A5
螺丝类型(mm)	M3	M4	M4
扭距(Nm)	0.5	0.5	1.2
绝缘材料	PA	PA	PA
UL 94材料阻燃等级	V0	V0	V0
标记条	ZB5	ZB5	ZB5
螺丝刀	SZS 0.6X3.5	SZS 0.6X3.5	SZS 0.6X3.5

C-10 JF5系列组合式接线端子



产品型号 Model	JF5-1.5/1
长高 Length/width/high (MM)	8*31*29
额定电流 Ratedcurrent	17.5A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.5*1.5mm²



产品型号 Model	JF5-1.5/2
长高 Length/width/high (MM)	19.5*31.5*31
额定电流 Ratedcurrent	17.5A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.5*1.5mm²



产品型号 Model	JF5-1.5/3
长高 Length/width/high (MM)	28.5*31.5*31
额定电流 Ratedcurrent	17.5A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.5*1.5mm²



产品型号 Model	JF5-1.5/5
长高 Length/width/high (MM)	46.5*31.5*31
额定电流 Ratedcurrent	17.5A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.5*1.5mm²



产品型号 Model	JF5-2.5/1
长高 Length/width/high (MM)	35*11*32
额定电流 Ratedcurrent	24A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.5*2.5mm²



产品型号 Model	JF5-2.5/2
长高 Length/width/high (MM)	37*24.5*32
额定电流 Ratedcurrent	24A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.5*2.5mm²



产品型号 Model	JF5-2.5/3
长高 Length/width/high (MM)	37*36*32
额定电流 Ratedcurrent	24A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.5*2.5mm²



产品型号 Model	JF5-2.5/5
长高 Length/width/high (MM)	37*59*32
额定电流 Ratedcurrent	24A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.5*2.5mm²



产品型号 Model	JF5-4/1
长高 Length/width/high (MM)	13*40*34.5
额定电流 Ratedcurrent	32A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.75*4mm²

C-10 JF5系列组合式接线端子



产品型号 Model	JF5-4/2
长高 Length/width/high (MM)	27.5*42*32
额定电流 Ratedcurrent	32A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.75*4mm²



产品型号 Model	JF5-4/3
长高 Length/width/high (MM)	41*42*32
额定电流 Ratedcurrent	32A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.75*4mm²



产品型号 Model	JF5-4/5
长高 Length/width/high (MM)	67*42*32
额定电流 Ratedcurrent	32A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	0.75*4mm²



产品型号 Model	JF5-6/1
长高 Length/width/high (MM)	21*53*41
额定电流 Ratedcurrent	41A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	2.5*6mm²



产品型号 Model	JF5-6/2
长高 Length/width/high (MM)	33*45*43
额定电流 Ratedcurrent	41A
额定电压 Ratedvoltage	660V
导线截面	2-6mm²



产品型号 Model	JF5-6/3
长高 Length/width/high (MM)	48*45*43
额定电流 Ratedcurrent	41A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	2.5*6mm



产品型号 Model	JF5-6/5
长高 Length/width/high (MM)	79*45*43
额定电流 Ratedcurrent	41A
额定电压 Ratedvoltage	660V
导线截面	2.5*6mm²



产品型号 Model	JF5-10/1
长高 Length/width/high (MM)	19.5*51*50
额定电流 Ratedcurrent	57A
额定电压 Ratedvoltage	660V
导线截面	4-10mm²



产品型号 Model	JF5-10-2
长高 Length/width/high (MM)	38*51*50
额定电流 Ratedcurrent	57A
额定电压 Ratedvoltage	660V
导线截面 Conductor cross section	4-10mm²

C-10 JF5系列组合式接线端子



产品型号Model	JF5-10/3
长高 Length/width/high (MM)	51*51*50
额定电流Ratedcurrent	57A
额定电压Ratedvoltage	660V
导线截面 Conductor cross section	4-10mm²



产品型号Model	JF5-10/5
长高 Length/width/high (MM)	92*51*50
额定电流Ratedcurrent	57A
额定电压Ratedvoltage	660V
导线截面 Conductor cross section	4-10mm²



产品型号Model	JF5-25/1
长高 Length/width/high (MM)	25*61*53.5
额定电流Ratedcurrent	101A
额定电压Ratedvoltage	660V
导线截面 Conductor cross section	10-25mm²



产品型号Model	JF5-25/2
长高 Length/width/high (MM)	48*61*53.5
额定电流Ratedcurrent	101A
额定电压Ratedvoltage	660V
导线截面 Conductor cross section	10-25mm²




产品型号Model	JF5-25/3
长高 Length/width/high (MM)	92*61*51
额定电流Ratedcurrent	101A
额定电压Ratedvoltage	660V
导线截面 Conductor cross section	10-25mm²



产品型号Model	JF5-25/5
长高 Length/width/high (MM)	114*61*51
额定电流Ratedcurrent	101A
额定电压Ratedvoltage	660V
导线截面 Conductor cross section	10-25mm²



产品型号Model	JF5-50/1
长高 Length/width/high (MM)	29.5*70*56
额定电流Ratedcurrent	150A
额定电压Ratedvoltage	660V
导线截面 Conductor cross section	10-50mm²

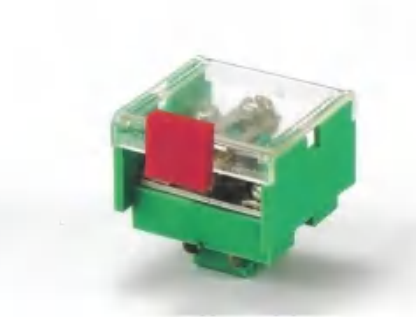

产品型号Model	JF5-2.5/S1
长高 Length/width/high (MM)	35.8*42*41
额定电流Ratedcurrent	24A
额定电压Ratedvoltage	660V
导线截面	0.5-2.5mm²




产品型号Model	JF5-2.5/S2
长高 Length/width/high (MM)	13*42*41
额定电流Ratedcurrent	24A
额定电压Ratedvoltage	660V
导线截面 Conductor cross section	0.5-2.5mm²

C-10 JF5系列组合式接线端子



产品型号Model	JF5-2.5/S3
长高 Length/width/high (MM)	10*60*54.5
额定电流Ratedcurrent	24A
额定电压Ratedvoltage	660V
导线截面 Conductor cross section	0.5-2.5mm²

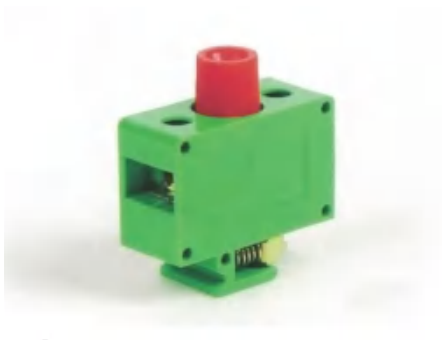

产品型号Model	JF5-2.5/RD
长高 Length/width/high (MM)	20*46.5*48.5
额定电流Ratedcurrent	24A
额定电压Ratedvoltage	660V
导线截面 Conductor cross section	0.5*2.5mm²




产品型号Model	JF5-2.5/JD
长高 Length/width/high (MM)	11.5*36*46
额定电流Ratedcurrent	24A
额定电压Ratedvoltage	660V
导线截面 Conductor cross section	0.5*2.5mm²



产品型号Model	JF5-1.5/2L
-----------	------------



产品型号Model	JF5-1.5/3L
-----------	------------

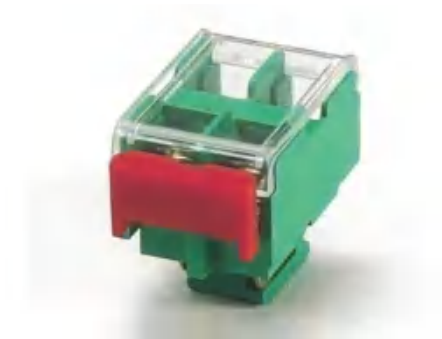


产品型号Model	JF5-2.5/2L
-----------	------------



产品型号Model	JF5-2.5/3L
-----------	------------


C



C-11 TK系列接线端子

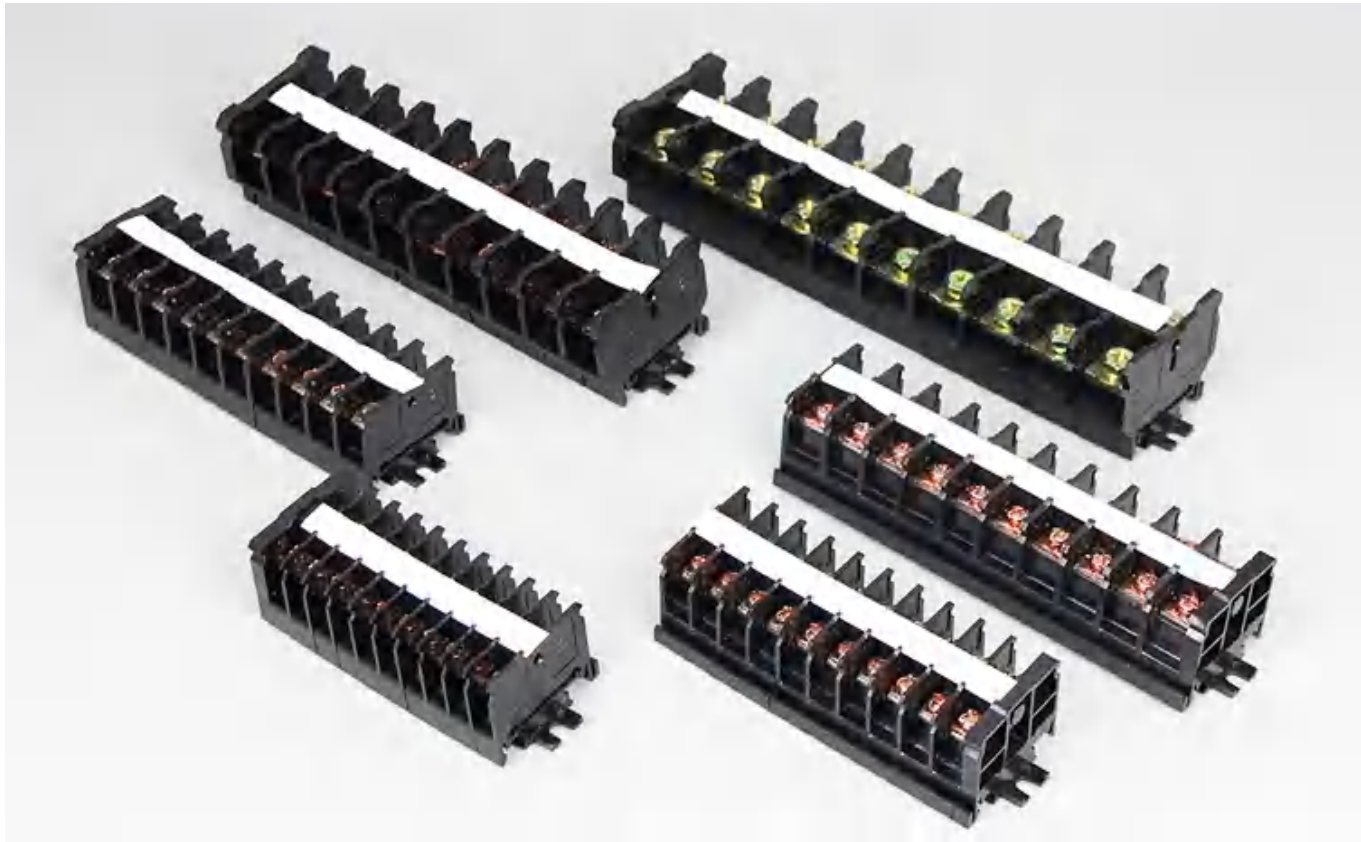

			
外形尺寸	TK-10A	TK-20A	TK-30A
宽度/厚度/高度(mm)	38/8.5/33.5	38/10.1/33.5	38/12/36.5
额定数据			
电压(V)/电流(A)	600V/10A	600V/20A	600V/30A
刚性导线/柔性导线(mm²)	0.5...0.75...1.0	1.0...1.5...2.0	2.0...2.5...3.0
截面(mm²)	1	2	3
安装轨 L1.2-7.5			
标记条			
固定件	TK-GD	TK-GD	TK-GD

C-11 TK系列接线端子

			
外形尺寸	TK-40A	TK-60A	TK-100A
宽度/厚度/高度(mm)	38/13.5/42.5	48/15.5/42.5	53/19.5/42
额定数据			
电压(V)/电流(A)	600V/40A	600V/60A	600V/100A
刚性导线/柔性导线(mm²)	3.0...3.5...4.0	5.0...7.5...10	10...15...20
截面(mm²)	4	10	20
安装轨 L1.2-7.5			
标记条			
固定件	TK-GD	TK-GD	TK-GD

				
外形尺寸	TK-150A	TK-1T15A	TK-3T15A	TK-3T15A
宽度/厚度/高度(mm)	43/14/42.5	62/8/59.5	39/25/32	41/34.5/33.5
额定数据				
电压(V)/电流 (A)	600V/150A	600V/15A	600V/15A	600V/40A
刚性导线/柔性导线(mm²)	15...20...35	0.75...1.0...1.5	0.75...1.0...1.5	2.0...3.0...4.0
截面(mm²)	35	1.5	1.5	4
安装轨 L1.2-7.5				
标记条				
固定件	TK-GD	TK-GD	TK-GD	TK-GD

C-12 IN系列接线端子



外形尺寸	IN-12BK 模数化大电流接线端子	IN-13BK 模数化大电流接线端子	IN-20BK 模数化大电流接线端子	IN-30BK 模数化大电流接线端子
宽度/厚度/高度(mm)	32/37/20.5	32/37/26	32/37/35.5	36/48/43
额定数据				
电压(V)/电流(A)	600V/20A	600V/20A	600V/30A	600V/50A
截面(mm²)	2.5	2.5	4	8
额定冲击电压/污染等级	8kV/Ⅲ	8kV/Ⅲ	8kV/Ⅲ	8kV/Ⅲ
螺丝公称直径(mm)	M3	M3	M4	M5
扭矩(Nm)	0.6-0.8	0.6-0.8	1.5-1.8	2.4-2.7
塞规	A3	A3	A5	A5
塑件材质	PC UL94V-0	PC UL94V-0	PC UL94V-0	PC UL94V-0
端子连接件	黄铜 镀镍	黄铜 镀镍	黄铜 镀镍	黄铜 镀镍
螺丝材质	钢 镀镍	钢 镀镍	钢 镀镍	钢 镀镍



外形尺寸	IN-411SC 模数化大电流接线端子	IN-60BK 模数化大电流接线端子	IN-100BK 模数化大电流接线端子	IN-200BK 模数化大电流接线端子
宽度/厚度/高度(mm)	36/48/17	40/55/23	48/73/32	60/86/40
额定数据				
电压(V)/电流(A)	600V/60A	600V/90A	600V/130A	600V/240A
截面(mm²)	14	22	38	100
额定冲击电压/污染等级	8kV/Ⅲ	8kV/Ⅲ	8kV/Ⅲ	8kV/Ⅲ
螺丝公称直径(mm)	M4	M6	M8	M10
扭矩(Nm)	1.5-1.8	3.2-3.7	15-20	25-30
塞规	B7	B9	B12	B15
塑件材质	PC UL94V-0	PC UL94V-0	PC UL94V-0	PC UL94V-0
端子连接件	黄铜 镀镍	黄铜 镀镍	黄铜 镀镍	黄铜 镀镍
螺丝材质	钢 镀镍	钢 镀镍	钢 镀镍	钢 镀镍

C-13 TBR/TBD组合接线端子



产品型号 Model	TBR-10A	产品型号 Model	TBR-20A	产品型号 Model	TBR-30A
长高 Length/ width/high (MM)	9*42*33mm	长高 Length/width/high (MM)	11*42*33mm	长高 Length/width/high (MM)	13*42*33mm
额定电流 Ratedcurrent	10A	额定电流 Ratedcurrent	20A	额定电流 Ratedcurrent	30A
额定电压 Ratedvoltage	600V	额定电压 Ratedvoltage	600V	额定电压 Ratedvoltage	600V
盖板型号 Top casingmodel	G-10A	盖板型号 Top casingmodel	G-20A	盖板型号 Top casingmodel	G-30A
导线截面 Conductorcrosssection	0.75-1.5mm²	导线截面 Conductorcrosssection	1.5-2.5mm²	导线截面 Conductorcrosssection	2.5-4mm²




产品型号 Model	TBR-60A	产品型号 Model	TBR-100A	产品型号 Model	TBR-200A
长高 Length/width/high (MM)	15*42*33mm	长高 Length/width/high (MM)	22*53*41mm	长高 Length/ width/high (MM)	10*62*54.8mm
额定电流 Ratedcurrent	60A	额定电流 Ratedcurrent	100A	额定电流 Ratedcurrent	200A
额定电压 Ratedvoltage	600V	额定电压 Ratedvoltage	600V	额定电压 Ratedvoltage	600V
盖板型号 Top casingmodel	G-60A	盖板型号 Top casingmodel	G-100A	盖板型号 Top casingmodel	G-200A
导线截面 Conductorcrosssection	4-10mm²	导线截面 Conductorcrosssection	10-35mm²	导线截面 Conductorcrosssection	10-95mm²



产品型号 Model	TBD-10A	产品型号 Model	TBD-20A	产品型号 Model	TBD-30A
长高 Length/width/high (MM)	8*62*54.8mm	长高 Length/width/high (MM)	9.5*62*54.8mm	长高 Length/ width/high (MM)	13*62*54.8mm
额定电流 Ratedcurrent	10A	额定电流 Ratedcurrent	20A	额定电流 Ratedcurrent	30A
额定电压 Ratedvoltage	600V	额定电压 Ratedvoltage	600V	额定电压 Ratedvoltage	600V
盖板型号 Top casingmodel	G-10A	盖板型号 Top casingmodel	G-20A	盖板型号 Top casingmodel	G-30A
导线截面 Conductorcrosssection	0.5-1.25mm²	导线截面 Conductorcrosssection	0.5-2mm²	导线截面 Conductorcrosssection	4-6mm²

C-14 小母线固定式接线端子

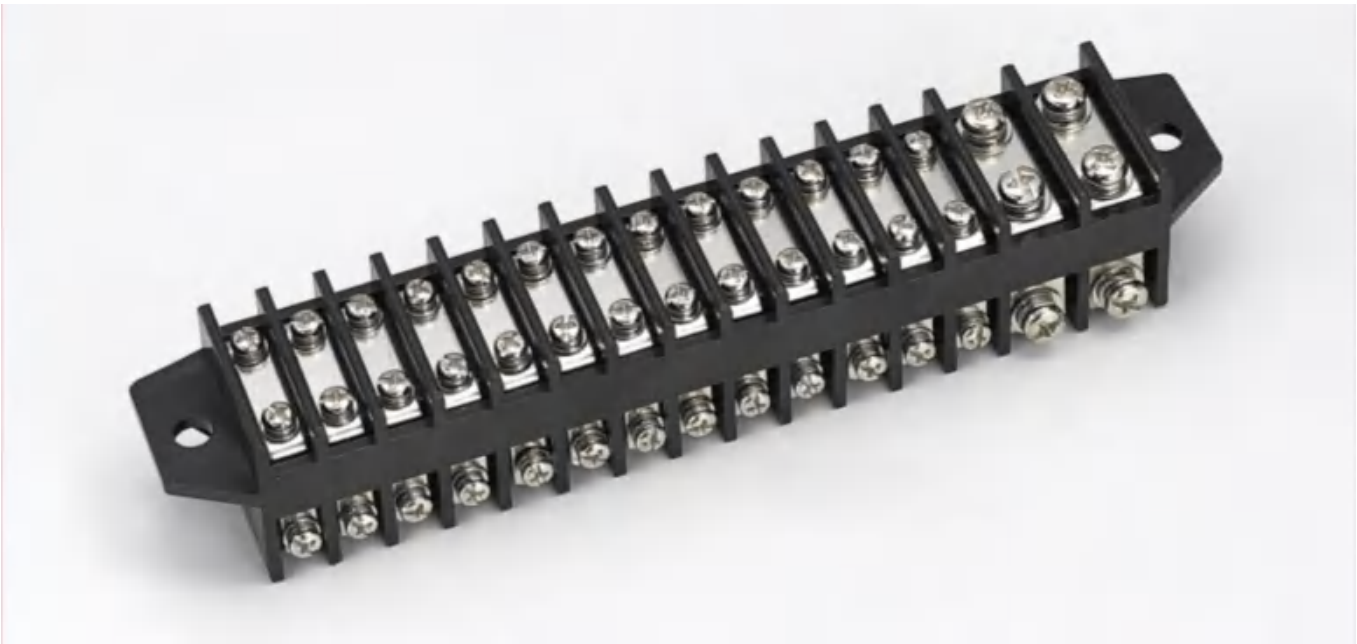

型号	CM1-15系列 小母线固定式接线端子		
尺寸 (mm)	长/宽/高 225*40*40	额定电压	500V
额定电流	41-101A	导线截面	6-25mm ²




型号	CM1-20系列 小母线固定式接线端子		
尺寸 (mm)	长/宽/高 228*50*30	额定电压	500V
额定电流	41-101A	导线截面	6-25mm ²

C-15 铜棒式小母线组合端子




型号	MJ1系列 铜棒式小母线组合端子		
尺寸 (mm)	厚/宽/高 (单片) 26.4*50.3*46.6	额定电压	660V
额定电流	24A	导线截面	1.5-2.5mm ²

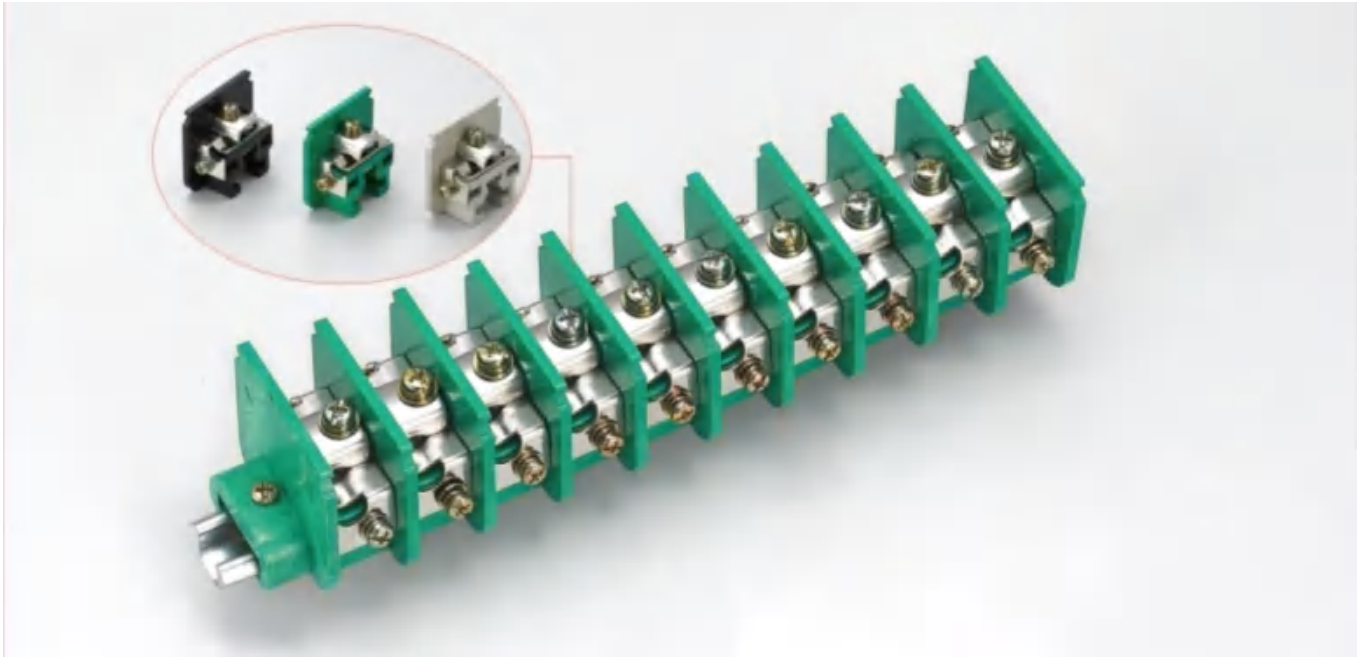

型号	MJ2系列 铜棒式小母线组合端子		
尺寸 (mm)	厚/宽/高 (单片) 20*50*45	额定电压	660V
额定电流	24A	导线截面	1.5-2.5mm ²

C-17 TB-15A 系列接线端子

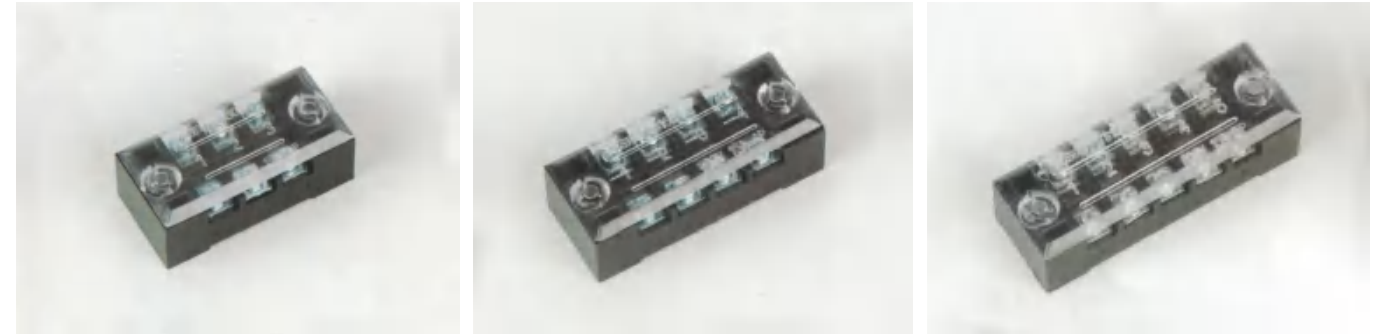

产品型号 Model	TB-1503	产品型号 Model	TB-1504	产品型号 Model	TB-1505
长高 Length/width/high (MM)	46*22*17.5	长高 Length/width/high (MM)	55*22*17.5	长高 Length/width/high (MM)	64*22*17.5
额定电流 Rated current	15A	额定电流 Rated current	15A	额定电流 Rated current	15A
额定电压 Rated voltage	600V	额定电压 Rated voltage	600V	额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M3	螺丝规格 Screw specifications	M3	螺丝规格 Screw specifications	M3
导线截面 Conductor cross section	0.5-1.5mm ²	导线截面 Conductor cross section	0.5-1.5mm ²	导线截面 Conductor cross section	0.5-1.5mm ²



产品型号 Model	TB-1506	产品型号 Model	TB-1507	产品型号 Model	TB-1508
长高 Length/width/high (MM)	73*22*17.5	长高 Length/width/high (MM)	77.6*22*17.5	长高 Length/width/high (MM)	90.3*22*17.5
额定电流 Rated current	15A	额定电流 Rated current	15A	额定电流 Rated current	15A
额定电压 Rated voltage	600V	额定电压 Rated voltage	600V	额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M3	螺丝规格 Screw specifications	M3	螺丝规格 Screw specifications	M3
导线截面 Conductor cross section	0.5-1.5mm²	导线截面 Conductor cross section	0.5-1.5mm²	导线截面 Conductor cross section	0.5-1.5mm²




产品型号 Model	TB-1510	产品型号 Model	TB-1512	产品型号 Model	TB-1515 (阻燃材料)
长高 Length/width/high (MM)	108*22*17.5	长高 Length/width/high (MM)	126*22*17.5	长高 Length/width/high (MM)	151*22*17.5
额定电流 Rated current	15A	额定电流 Rated current	15A	额定电流 Rated current	15A
额定电压 Rated voltage	600V	额定电压 Rated voltage	600V	额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M3	螺丝规格 Screw specifications	M3	螺丝规格 Screw specifications	M3
导线截面 Conductor cross section	0.5-1.5mm ²	导线截面 Conductor cross section	0.5-1.5mm ²	导线截面 Conductor cross section	0.5-1.5mm ²

型号	TB-1520(阻燃材料)	螺丝规格	M3
尺寸 (mm)	长/宽/高 195*22*17.5	额定电压	600V
额定电流	15A	导线截面	0.5-1.5mm²

C

C-18 TB-25A系列接线端子

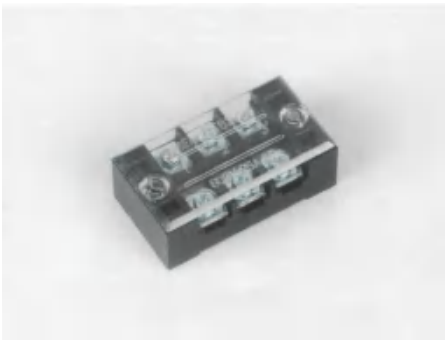


产品型号 Model	TB-2503
长高 Length/width/high (MM)	55*30*19
额定电流 Rated current	25A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²




产品型号 Model	TB-2505
长高 Length/width/high (MM)	80*30*19
额定电流 Rated current	25A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²




产品型号 Model	TB-2504
长高 Length/width/high (MM)	67*30*19
额定电流 Rated current	25A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²

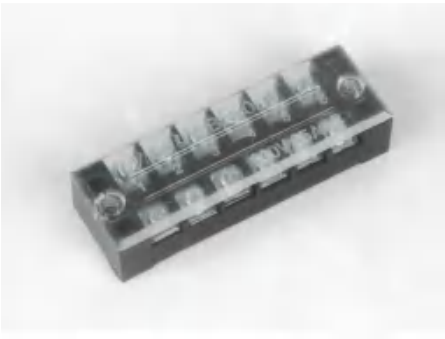


产品型号 Model	TB-2506
长高 Length/width/high (MM)	91*30*19
额定电流 Rated current	25A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²

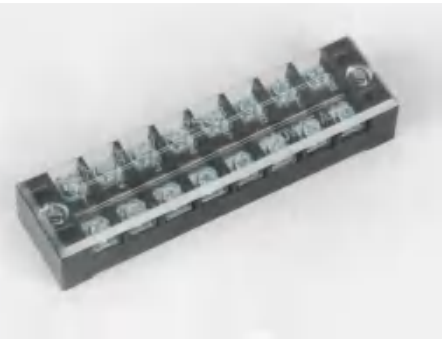


产品型号 Model	TB-2508
长高 Length/width/high (MM)	116*30*19
额定电流 Rated current	25A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²

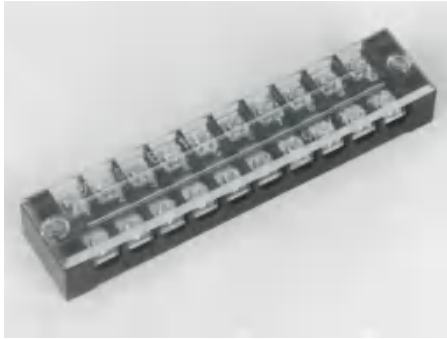

产品型号 Model	TB-2510
长高 Length/width/high (MM)	139*30*19
额定电流 Rated current	25A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²

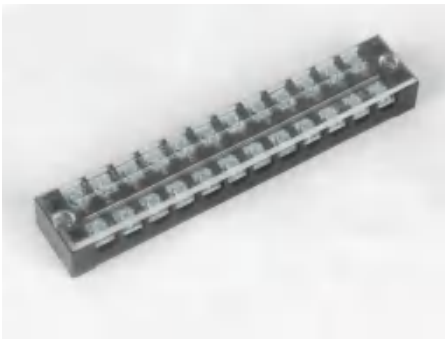

产品型号 Model	TB-2512
长高 Length/width/high (MM)	164*30*19
额定电流 Rated current	25A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²

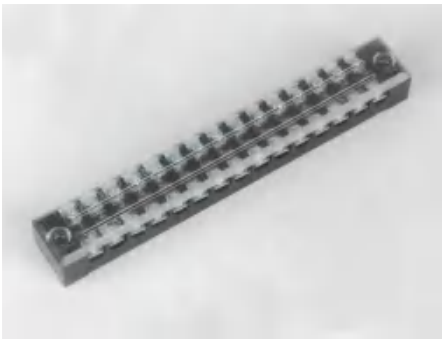


产品型号 Model	TB-2515 (阻燃材料)
长高 Length/width/high (MM)	196.5*30*19
额定电流 Rated current	25A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²



产品型号 Model	TB-2520 (阻燃材料)
长高 Length/width/high (MM)	256*30*19
额定电流 Rated current	25A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²


C-19 TB-45A/TA系列接线端子

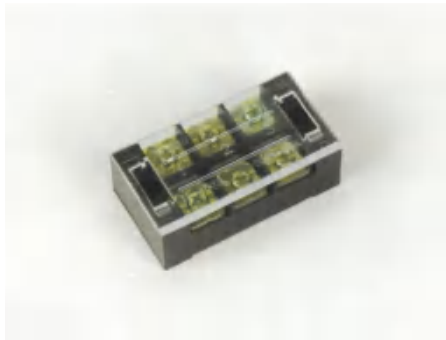

产品型号 Model	TB-4503
长高 Length/width/high (MM)	70*38*24
额定电流 Rated current	45A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M5
导线截面 Conductor cross section	0.5-4mm²




产品型号 Model	TB-4504
长高 Length/width/high (MM)	87*38*24
额定电流 Rated current	45A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M5
导线截面 Conductor cross section	0.5-4mm²

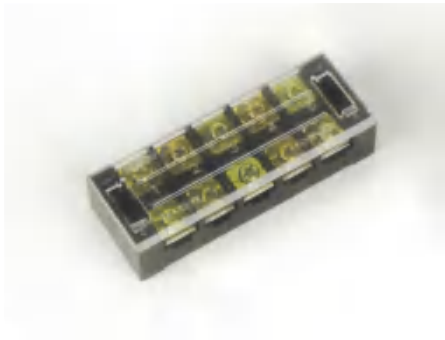


产品型号 Model	TB-4505
长高 Length/width/high (MM)	103*38*24
额定电流 Rated current	45A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M5
导线截面 Conductor cross section	0.5-4mm²



产品型号 Model	TB-4506
长高 Length/width/high (MM)	120*38*24
额定电流 Rated current	45A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M5
导线截面 Conductor cross section	0.5-4mm²

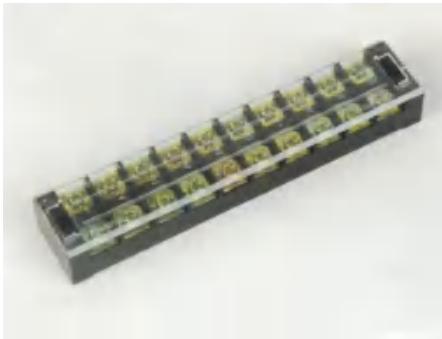


产品型号 Model	TB-4510
长高 Length/width/high (MM)	188*38*24
额定电流 Rated current	45A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M5
导线截面 Conductor cross section	0.5-4mm²

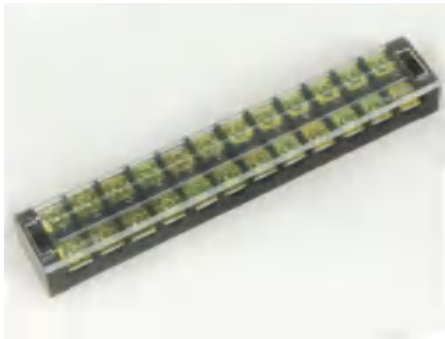


产品型号 Model	TB-4512
长高 Length/width/high (MM)	222*38*24
额定电流 Rated current	45A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M5
导线截面 Conductor cross section	0.5-4mm²



产品型号 Model	TA-2003
长高 Length/width/high (MM)	59.5*34*21
额定电流 Rated current	20A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²

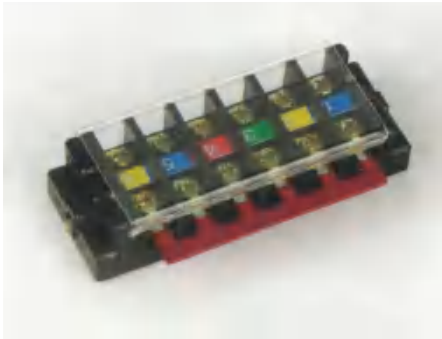

产品型号 Model	TA-2006
长高 Length/width/high (MM)	92.5*34*21
额定电流 Rated current	20A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²

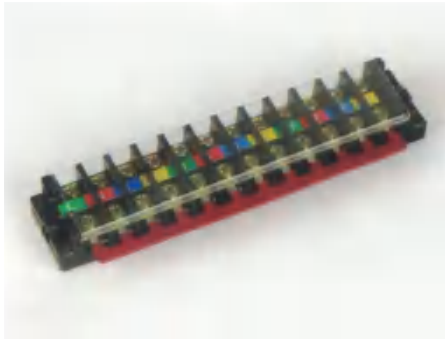

产品型号 Model	TA-2012
长高 Length/width/high (MM)	167*5*34*21
额定电流 Rated current	20A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M4
导线截面 Conductor cross section	0.5-2.5mm²

C-20 TBC 固定式系列接线端子



产品型号 Model	TBC-6003	产品型号 Model	TBC-6004	产品型号 Model	TBC-6005
长高 Length/width/high (MM)	75*38*32	长高 Length/width/high (MM)	92.5*38*32	长高 Length/width/high (MM)	111*38*32
额定电流 Rated current	60A	额定电流 Rated current	60A	额定电流 Rated current	60A
额定电压 Rated voltage	600V	额定电压 Rated voltage	600V	额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M6	螺丝规格 Screw specifications	M6	螺丝规格 Screw specifications	M6
导线截面 Conductor cross section	0.5-10mm²	导线截面 Conductor cross section	0.5-10mm²	导线截面 Conductor cross section	0.5-10mm²




产品型号 Model	TBC-6006	产品型号 Model	TBC-6012	产品型号 Model	TBC-1003
长高 Length/width/high (MM)	128.5*38*32	长高 Length/width/high (MM)	235*38*32	长高 Length/width/high (MM)	86.7*43.5*35
额定电流 Rated current	60A	额定电流 Rated current	60A	额定电流 Rated current	100A
额定电压 Rated voltage	600V	额定电压 Rated voltage	600V	额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M6	螺丝规格 Screw specifications	M6	螺丝规格 Screw specifications	M6
导线截面 Conductor cross section	0.5-10mm²	导线截面 Conductor cross section	0.5-10mm²	导线截面 Conductor cross section	0.5-25mm²




产品型号 Model	TBC-1004	产品型号 Model	TBC-1006	产品型号 Model	TBC-10012
长高 Length/width/high (MM)	109*43.5*35	长高 Length/width/high (MM)	153*43.5*35	长高 Length/width/high (MM)	284*43.5*35
额定电流 Rated current	100A	额定电流 Rated current	100A	额定电流 Rated current	100A
额定电压 Rated voltage	600V	额定电压 Rated voltage	600V	额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M6	螺丝规格 Screw specifications	M6	螺丝规格 Screw specifications	M6
导线截面 Conductor cross section	0.5-25mm²	导线截面 Conductor cross section	0.5-25mm²	导线截面 Conductor cross section	0.5-25mm²

C-21 TD 系列接线端子

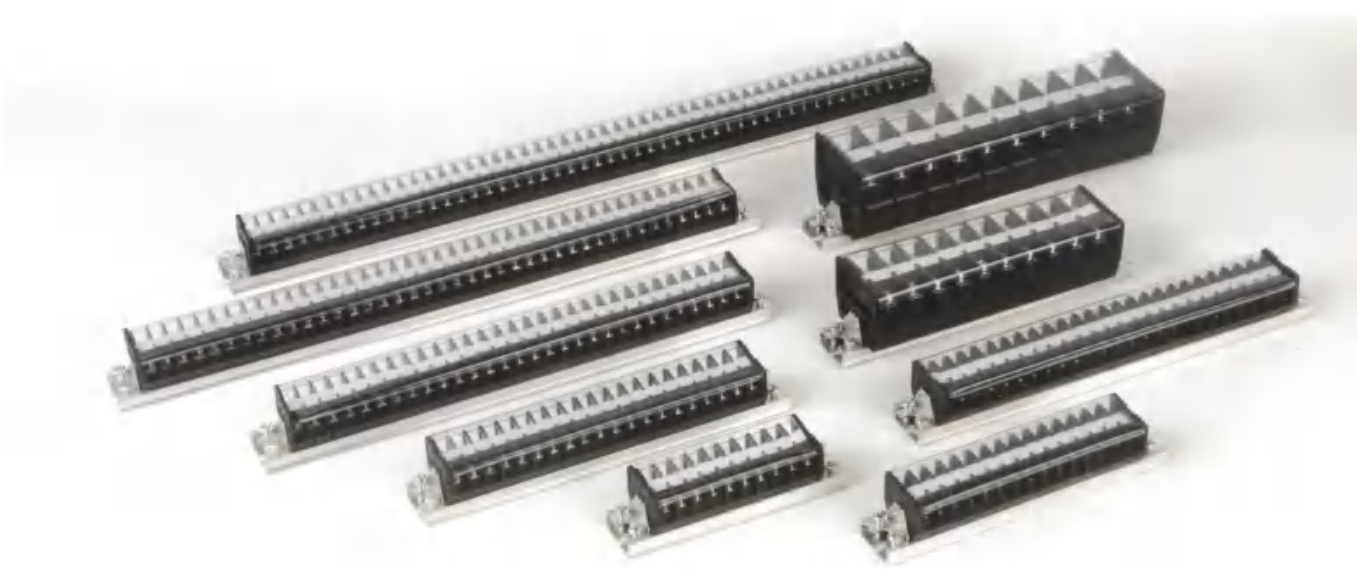


产品型号 Model	TD-1510	产品型号 Model	TD-2010	产品型号 Model	TD-3010
长高 Length/width/high (MM)	116*30.5*31	长高 Length/width/high (MM)	147*39*38.5	长高 Length/width/high (MM)	180*43.7*45
额定电流 Rated current	15A	额定电流 Rated current	20A	额定电流 Rated current	30A
额定电压 Rated voltage	600V	额定电压 Rated voltage	600V	额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M3	螺丝规格 Screw specifications	M4	螺丝规格 Screw specifications	M5
导线截面 Conductor cross section	0.75-1.5mm²	导线截面 Conductor cross section	1.5-2.5mm²	导线截面 Conductor cross section	2.5-6mm²

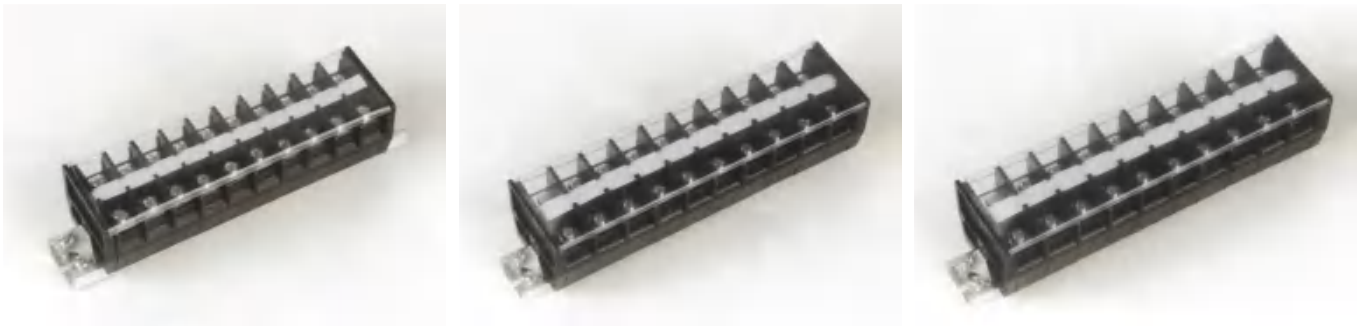


产品型号 Model	TD-6010	产品型号 Model	TD-10010	产品型号 Model	TD-15010/20010
长高 Length/width/high (MM)	224*52*53	长高 Length/width/high (MM)	260*60*50	长高 Length/width/high (MM)	266*65*50
额定电流 Rated current	60A	额定电流 Rated current	100A	额定电流 Rated current	150/200A
额定电压 Rated voltage	600V	额定电压 Rated voltage	600V	额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M5	螺丝规格 Screw specifications	M6	螺丝规格 Screw specifications	M8
导线截面 Conductor cross section	4-10mm²	导线截面 Conductor cross section	10-25mm²	导线截面 Conductor cross section	25-35mm²


C-22 TC 系列大电流接线端子




产品型号 Model	TC-602
长高 Length/width/high (MM)	58*42.4*35
额定电流 Rated current	60A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M6
导线截面 Conductor cross section	6-14mm²




产品型号 Model	TC-603
长高 Length/width/high (MM)	86.7*43*33.5
额定电流 Rated current	60A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M6
导线截面 Conductor cross section	6-14mm²

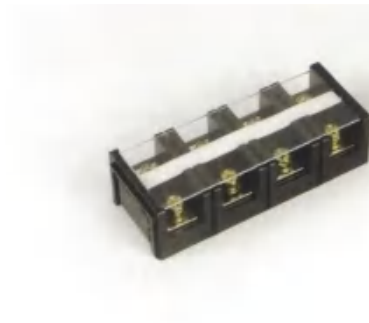

产品型号 Model	TC-604
长高 Length/width/high (MM)	116*43*33.5
额定电流 Rated current	60A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M6
导线截面 Conductor cross section	6-14mm²




产品型号 Model	TC-1002
长高 Length/width/high (MM)	69.3*54.4*39
额定电流 Rated current	100A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M6
导线截面 Conductor cross section	10-22mm²




产品型号 Model	TC-1003
长高 Length/width/high (MM)	106*54.5*37.5
额定电流 Rated current	100A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M6
导线截面 Conductor cross section	10-22mm²



产品型号 Model	TC-1004
长高 Length/width/high (MM)	140*54.5*37.5
额定电流 Rated current	100A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M6
导线截面 Conductor cross section	10-22mm²



产品型号 Model	TC-1503
长高 Length/width/high (MM)	115*5*66.3*40
额定电流 Rated current	150A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M8
导线截面 Conductor cross section	40-60mm²



产品型号 Model	TC-1504
长高 Length/width/high (MM)	152*66.3*40
额定电流 Rated current	150A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M8
导线截面 Conductor cross section	40-60mm²



产品型号 Model	TC-2003
长高 Length/width/high (MM)	132*72*45
额定电流 Rated current	150A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M8
导线截面 Conductor cross section	40-60mm²


C-22 TC 系列大电流接线端子



产品型号 Model	TC-2004
长高 Length/width/high (MM)	176*73*45
额定电流 Rated current	200A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M8
导线截面 Conductor cross section	60-100mm²



产品型号 Model	TC-3003
长高 Length/width/high (MM)	166*90*52
额定电流 Rated current	300A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M10
导线截面 Conductor cross section	100-150mm²

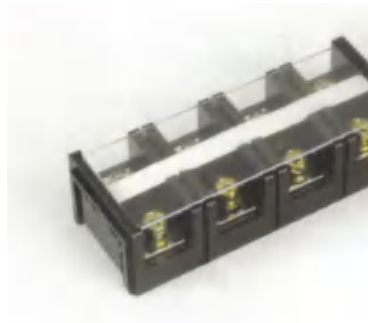

产品型号 Model	TC-3004
长高 Length/width/high (MM)	220*90*52
额定电流 Rated current	300A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M10
导线截面 Conductor cross section	100-150mm²



产品型号 Model	TC-4003
长高 Length/width/high (MM)	165*90*52
额定电流 Rated current	400A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M10
导线截面 Conductor cross section	100-150mm²



产品型号 Model	TC-4004
长高 Length/width/high (MM)	220*90*52
额定电流 Rated current	400A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M10
导线截面 Conductor cross section	100-150mm²



产品型号 Model	TC-6003
长高 Length/width/high (MM)	205*74*100
额定电流 Rated current	600A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M12
导线截面 Conductor cross section	200-400mm²



产品型号 Model	TC-6004
长高 Length/width/high (MM)	275*74*100
额定电流 Rated current	600A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M12
导线截面 Conductor cross section	200-400mm²




产品型号 Model	TC-10003
长高 Length/width/high (MM)	236*114*85.2
额定电流 Rated current	1000A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M12
导线截面 Conductor cross section	300-500mm²



产品型号 Model	TC-10004
长高 Length/width/high (MM)	315*114*85.2
额定电流 Rated current	1000A
额定电压 Rated voltage	600V
螺丝规格 Screw specifications	M12
导线截面 Conductor cross section	300-500mm²


C-23 短接片系列

继电器短接片

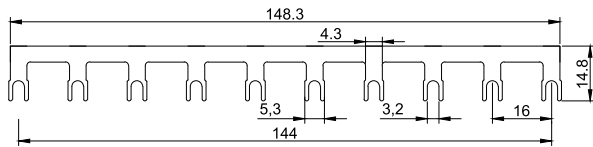


DLP-16 (10节)

继电器短接片

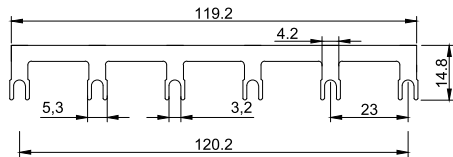


DLP08A-23 (6节)

继电器短接片




DLP14A-29.6 (8节)

继电器短接片

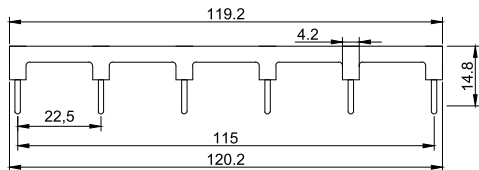

DLP08A-22.5

继电器短接片

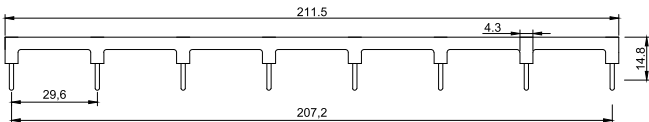


DLP14A-29.6

三层端子边插



DLP-DIKD1.5




C-23 短接片系列

短接片




DLP-1512

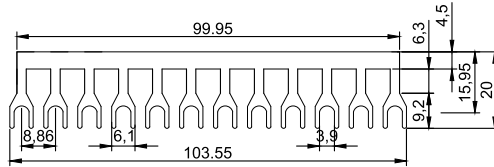

短接片




DLP-2512

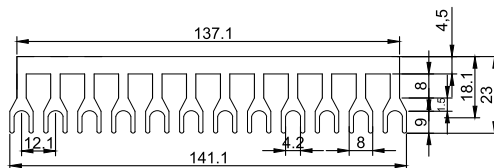


短接片




DLP-1510

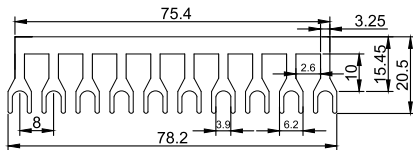

短接片

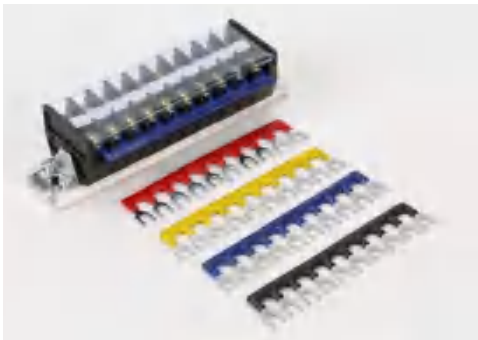


DLP-2010

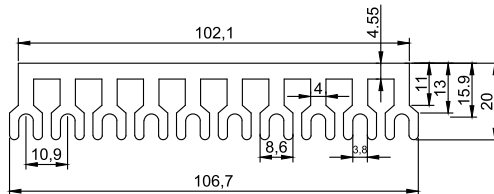

短接片




DLP-TBR-10A
DLP-TBC-10A

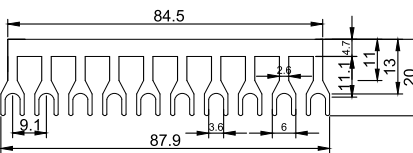

C-23 短接片系列


短接片

DLP-TBR-20A
DLP-TBC-20A

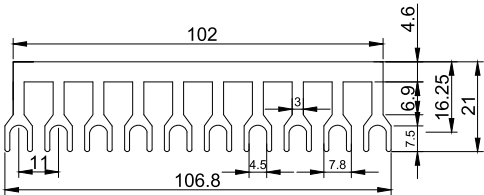


短接片

DLP-TBD-10A
DLP-TB1510 (10节)

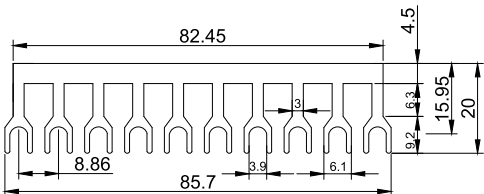


短接片

DLP-TBD-20A (10节)

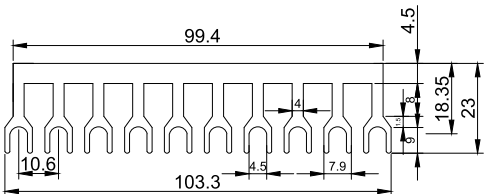



短接片

DLP-RBR-30A
DLP-TBC-30A
DLP-TD 3010
(10节)

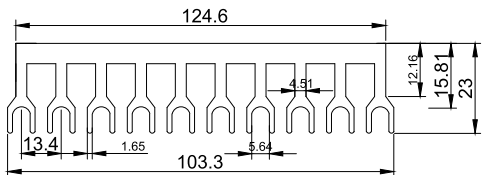


立体短接片

DLP-NHT-53-12
DLP-TB1512

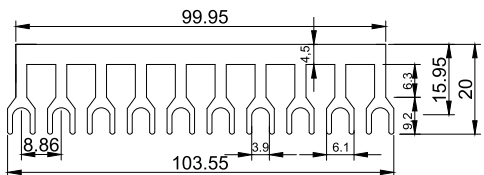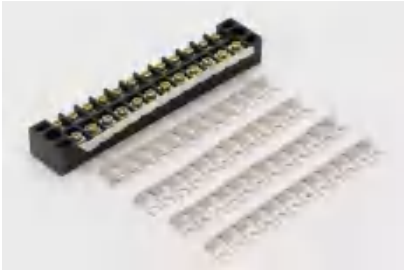


立体短接片

DLP-TBD-2012

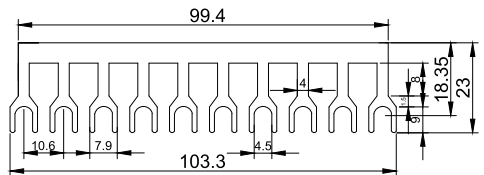

C-24 TBC/TBR/TBD防尘盖板

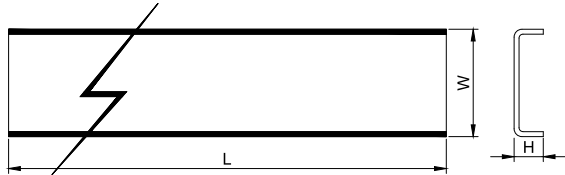

型号 Item	L(m)	W(mm)	H(mm)
G-TBC-10A	1米	30	5
G-TBC-20A	1米	33.2	5
G-TBC-30A	1米	33.2	5
G-TBC-60A	1米	51.3	5
G-TBR-10A	1米	30	5
G-TBR-20A	1米	33.2	5
G-TBR-30A	1米	33.2	5
G-TBD-10A	1米	30	5
G-TBD-20A	1米	33.2	5
注: G-TBC-20A/G-TBC-30A G-TBD-20A/G-TBD30A、G-TBR20A/G-TBR30A这6款盖板为通用型号			

C

C-25 快速接线端子



WKSI-4002



WKSI-4003



WKSI-4004



WKSI-4005




型号	接线端子类型	回路数	柔性导线	刚性导线	电压	电流	工作温度	剥线长度	材质
WKSI-4002		2	0.5-2.5	0.5-4	450V	32A	-40℃至-105℃	11mm	外壳PA: 聚碳酸脂 操作杆材料: 聚酰胺66 导电部件材料 铜 接触弹簧材料 301不锈钢
WKSI-4003		3							
WKSI-4004		4							
WKSI-4005		5							


C-25 快速接线端子




WKSE-2502

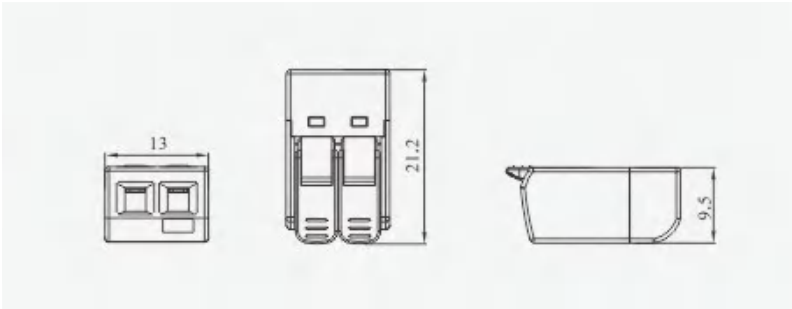


WKSE-2503

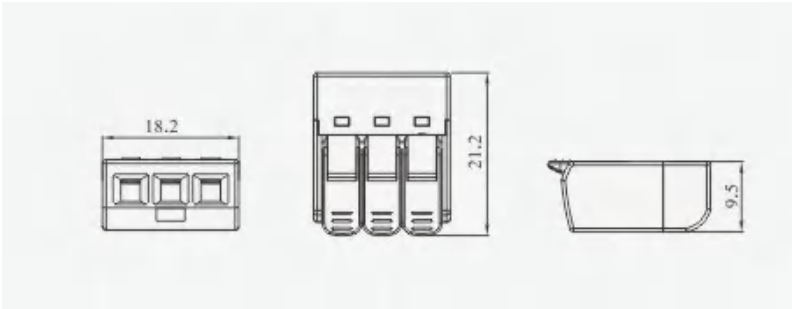

WKSE-2504

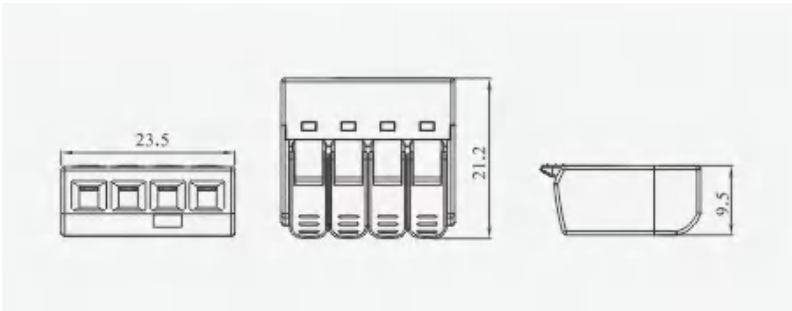

WKSE-2505

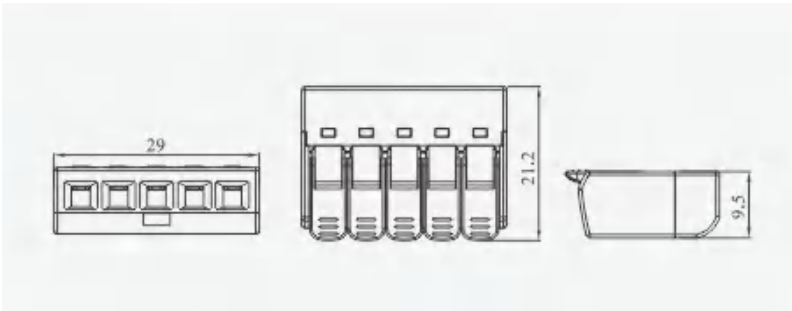


型号	接线端子类型	回路数	柔性导线	刚性导线	电压	电流	工作温度	剥线长度	材质
WKSE-2502		2	1.0-2.5	0.75-2.5	450V	32A	-40℃至-105℃	13mm	外壳PA: 聚碳酸脂 操作杆材料: 聚酰胺66 导电部件材料 铜 接触弹簧材料 301不锈钢
WKSE-2503		3							
WKSE-2504		4							
WKSE-2505		5							


C-25 快速接线端子




WKS3-2502(红)(灰)

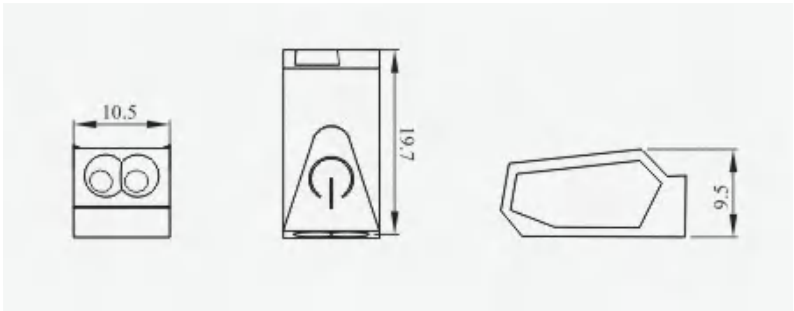


WKS3-2503(灰)(橙)

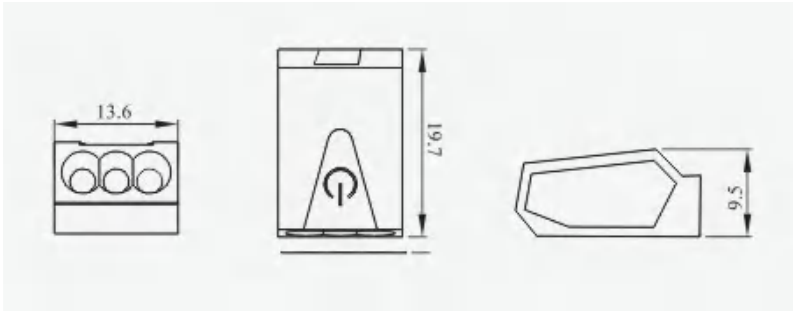

WKS3-2504(黄)(灰)

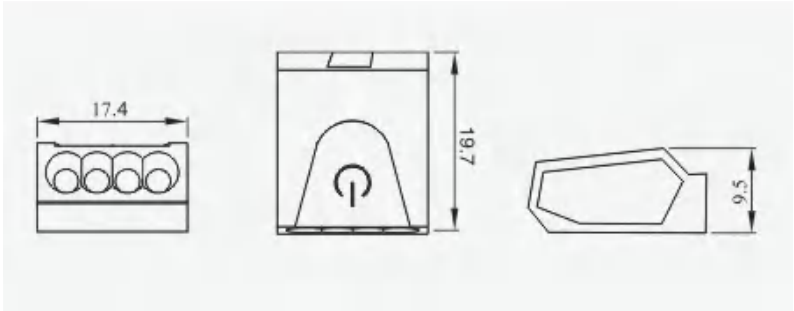

WKS3-2505(灰)(灰)

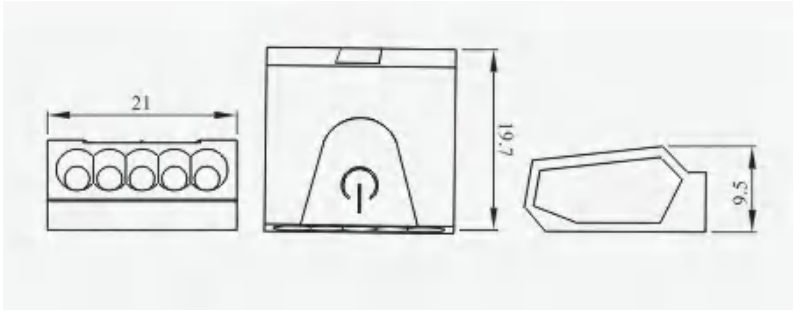


型号	接线端子类型	回路数	柔性导线	刚性导线	电压	电流	工作温度	剥线长度	材质
WKS3-2502		2	0.75-2.5	0.75-2.5	450V	24A	-40℃至-105℃	11mm	外壳PA: 聚碳酸脂 操作杆材料: 聚酰胺66 导电部件材料: 铜 接触弹簧材料: 301不锈钢
WKS3-2503		3							
WKS3-2504		4							
WKS3-2505		5							


C-25 快速接线端子



WKS4-2502

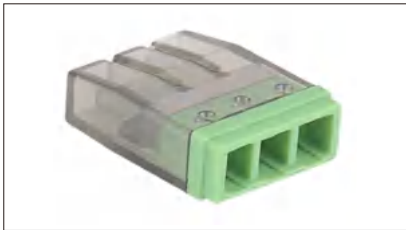


WKS4-2503

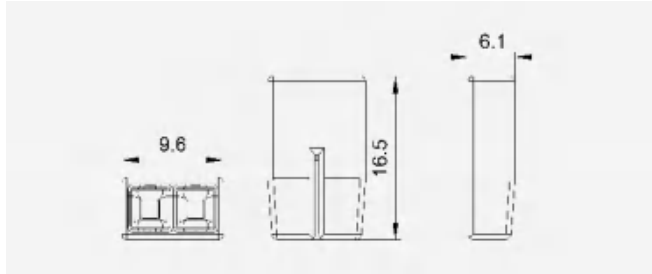

WKS4-2504





WKS4-2505

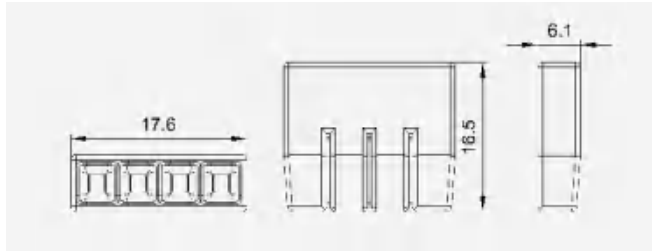

WKS4-2506



WKS4-2508

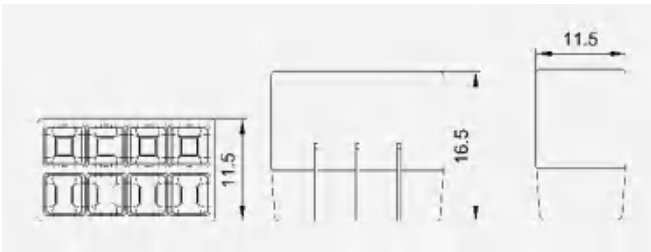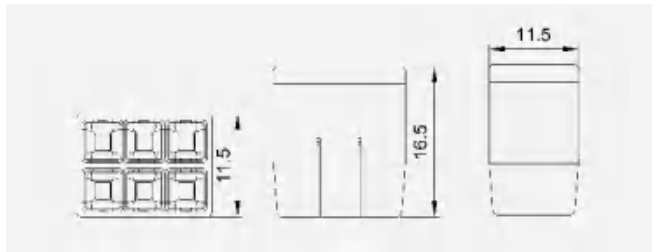


型号	接线端子类型	回路数	刚性导线	电压	电流	工作温度	剥线长度	材质
WKS4-2502		2	0.5-2.5	450V	24A	-40℃至-105℃	11mm	外壳PA: 聚碳酸脂 操作杆材料: 聚酰胺66 导电部件材料: 铜 接触弹簧材料: 301不锈钢
WKS4-2503		3						
WKS4-2504		4						
WKS4-2505		5						
WKS4-2506		6						
WKS4-2508		8						

C


C-25 快速接线端子




WKS5-402

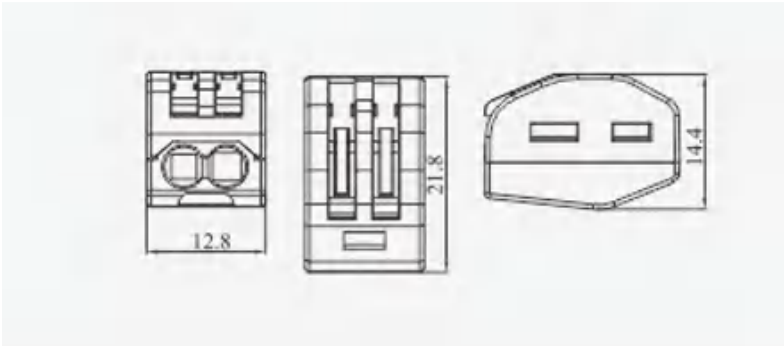

WKS5-403




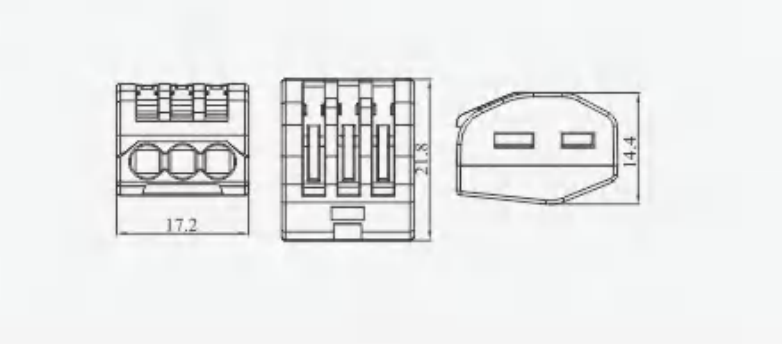


WKS5-404

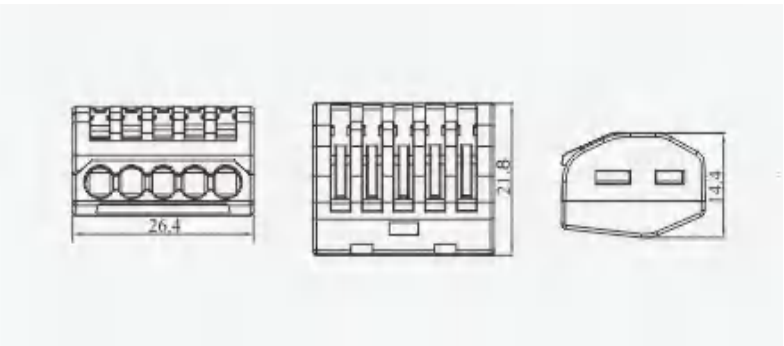

型号	接线端子类型	回路数	柔性导线	刚性导线	电压	电流	工作温度	剥线长度	材质
WKS5-402		2	0.08-2.5	0.2-4	450V	32A	-40°C至-105°C	11mm	外壳PA: 聚碳酸酯 操作杆材料: 聚酰胺66 导电部件材料: 铜 接触弹簧材料: 301不锈钢
WKS5-403		3							
WKS5-404		4							

C-25 快速接线端子

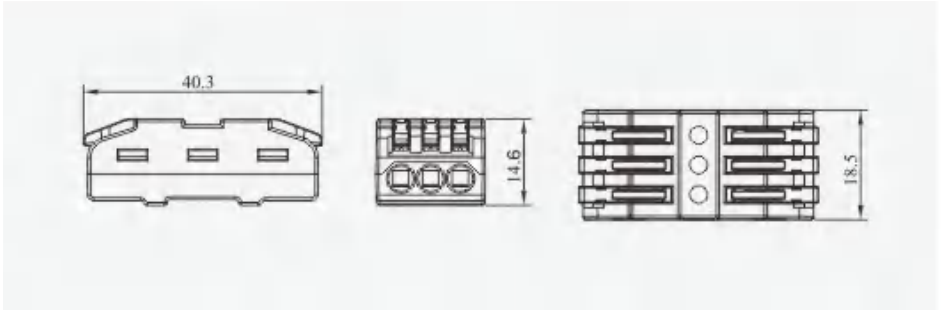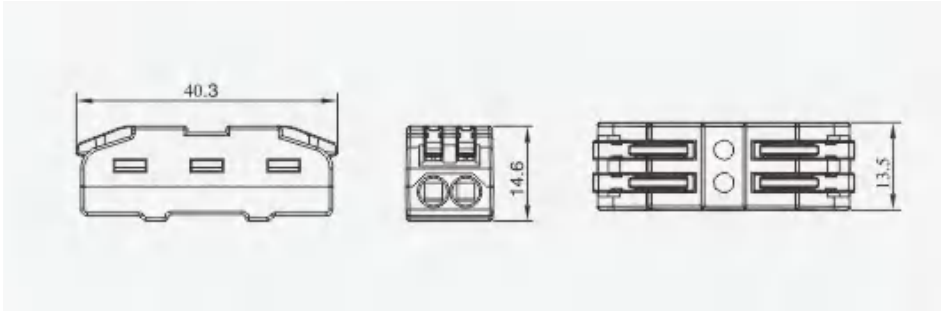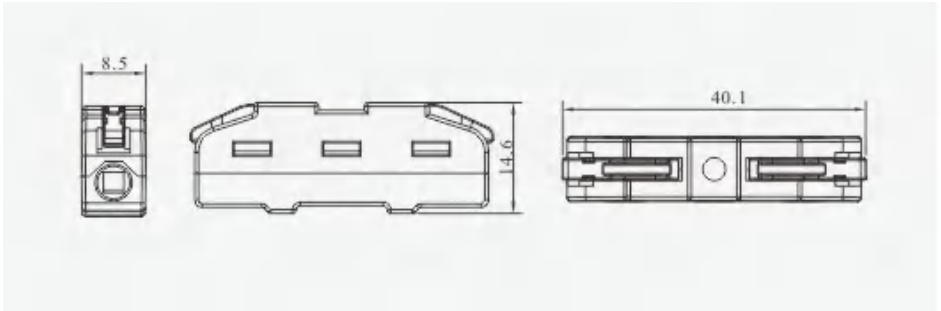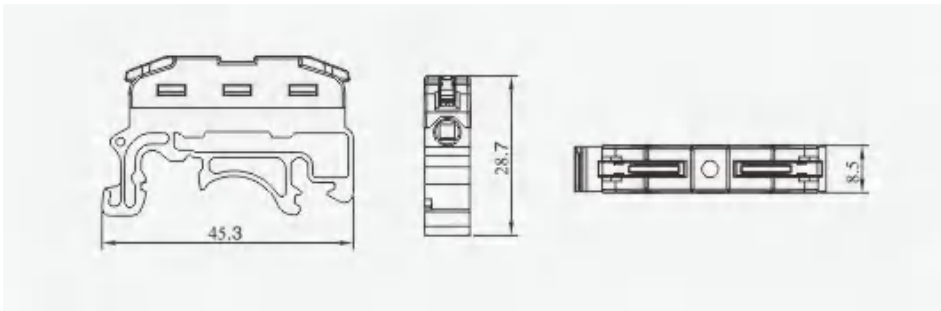

型号	接线端子类型	回路数	柔性导线	刚性导线	电压	电流	工作温度	剥线长度	材质
WKS6-402/DG		2	0.08-2.5	0.2-4	450V	32A	-40°C至-105°C	13mm	外壳PA: 聚碳酸酯 操作杆材料: 聚酰胺66 导电部件材料: 铜 接触弹簧材料: 301不锈钢
WKS6-402		2							
WKS6-404		4							
WKS6-406		6							

C-25 快速接线端子



WKS7-2502



WKS7-2504








WKS7-2506



WKS7-2508



WKS7-6003

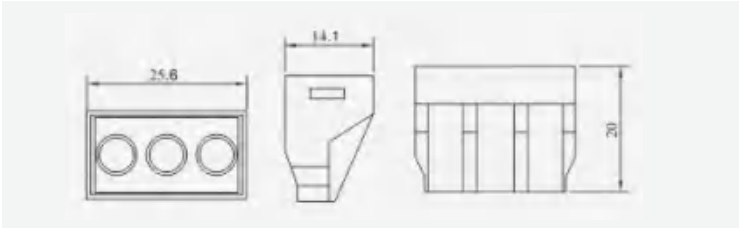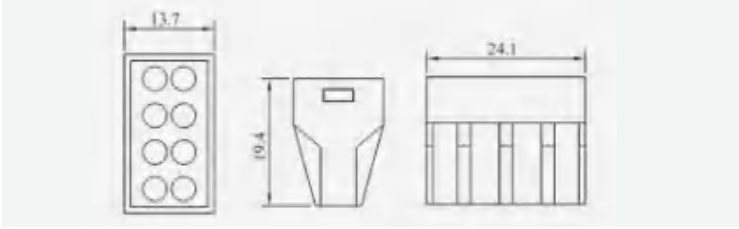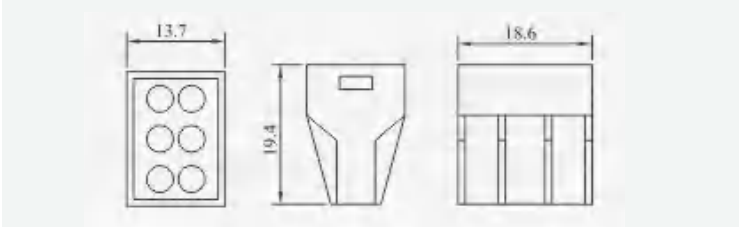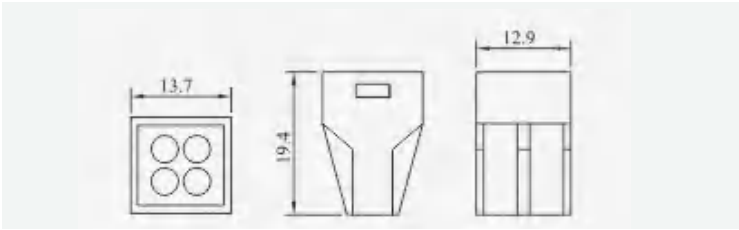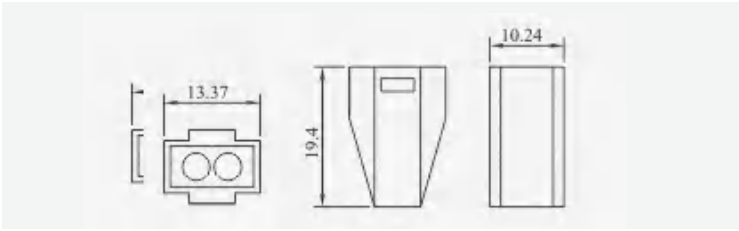



型号	接线端子类型	回路数	刚性导线	电压	电流	工作温度	剥线长度	材质
WKS7-2502(黄)		2	1.0-2.5	450V	24A	-40℃至-105℃	11mm	外壳PA: 聚碳酸脂 操作杆材料: 聚酰胺66 导电部件材料: 铜 接触弹簧材料: 301不锈钢
WKS7-2504(橙)		4						
WKS7-2506(紫)		6						
WKS7-2508(灰)		8						
WKS7-6003		3	1.5-6					

C-26 熔断器接线盒系列



型号	材质	阻燃等级	刚性导线	电压	电流	工作温度	颜色
WRD-1	PA尼龙 66 黄铜 镀锌螺丝 不锈钢弹簧	94V-2	1.0-2.5	500V	25A	-30℃至110℃	自然色
WRD-2	PA尼龙 66 黄铜 镀锌螺丝 不锈钢弹簧	94V-2	1.0-2.5	500V	25A	-30℃至110℃	自然色

电度表用接线端子

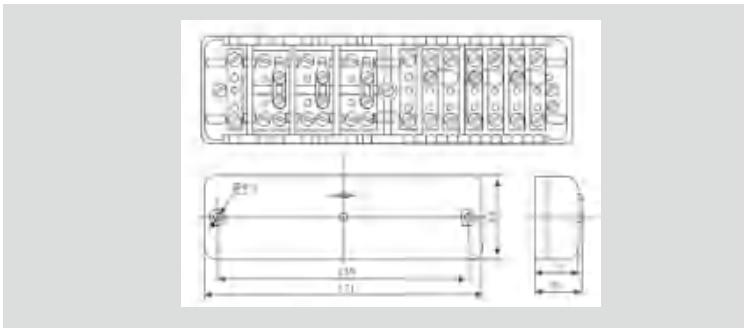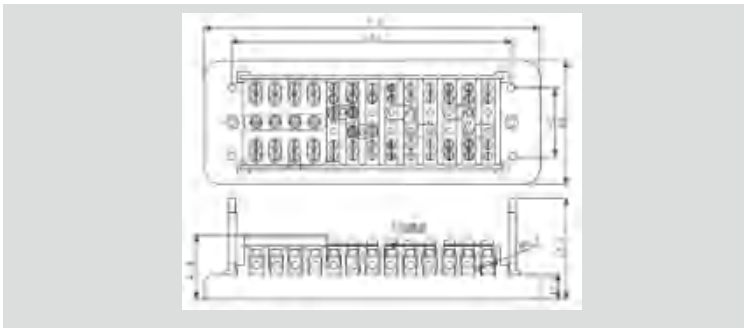

型号	额定电压	额定电流	导线截面	孔径	开孔尺寸	外形尺寸
WDB-1	500V	40A	2.5-6	φ6.5	182x45mm	219x80x41.8mm
型号	额定电压	支线电流	主线电流	防护等级	工作温度	外形尺寸
WDB-2	400V	5A	25A	IP30	-40℃至80℃	171x54x38mm